



Model Type:	Signature 770 • Signature 786
Seating:	770 / 4 - 6 Adults • 786 / 6 - 8 Adults
Dimensions:	770 / 84" x 84" x 41.5" (includes 6" frame height) 786 / 84" x 102" x 41.5" (includes 6" frame height)
Water Depth:	30.5"
Shell Material:	Stainless Steel / 16-gauge 316L
Frame:	Fully integrated stainless steel frame / 16-gauge
Water Volume:	770 / 340 gallons • 786 / 456 gallons
Spa Weight:	770 774 lbs. Frame Mounted (3610 lbs. Total weight with water) 770 602 lbs. Shell Only (3438 lbs. Total weight with water) 786 955 lbs. Frame Mounted (4753 lbs. Total weight with water) 786 783 lbs. Shell Only (4581 lbs. Total weight with water)
Shell Insulation:	Closed cell high density urethane foam
Jets:	16 commercial grade adjustable hydrotherapy jets
Seats:	13" wide bench "open plan" seating on all four sides
Lighting:	(1) LED underwater color wheel light / low voltage
Finish:	Tile Trim: tile on top lip, waterline, floor, steps, and benches Stainless Steel: #2 non-directional buffed on walls, foot-well, and step risers
Equipment:	(1) Pentair Power Center; dimensions: 17" L x 5.25" D x 26" H
Pump 1:	(1) Variable speed filter/jet pump
Pump 2:	(1) Single speed jet pump
Heater:	(1) 11kW heater (Gas-ready option available for Remote Equipment)
Filter:	(1) 100 sq.ft. cartridge filter
Sanitation:	Copper / Silver Ionizer
Electrical Req.:	230 volt, 100 amp circuit, 4-wire consisting of two hots, one neutral, one ground
Control System:	Pentair ScreenLogic bundle with smart device capability and WiFi for full system control anywhere around the globe with Internet access
Equipment Skid:	36" L x 48" D x 41" H, 188 lbs weight (Remote Equipment pack only)
Certifications:	IAPMO Certified, VGBA Compliant, AWS Certified Welding
Warranty:	25-years structural stainless steel shell, 5-years tile adhesion, 1-year plumbing, 3-years Pentair components (parts and labor)

NOTE: Unless otherwise noted for the **786** model in BLUE, the specifications are the same for both models
NOTE: The outlines below show shell design for spas with Frame Mounted Equipment.



770 / 4 - 6 Adults

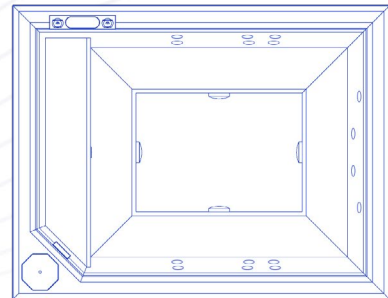

786 / 6 - 8 Adults